


BLOOM™ WINCH




Series 1400 Galv & Series 1400V Galv **HYDRAULIC CAPSTAN WINCHES**

*"Quality Since
1910"*

Series 1400 Capstan

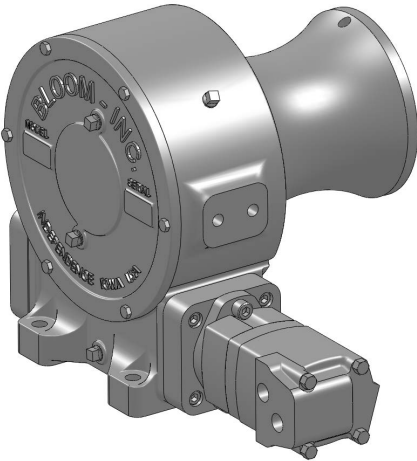

Series 1400V Capstan

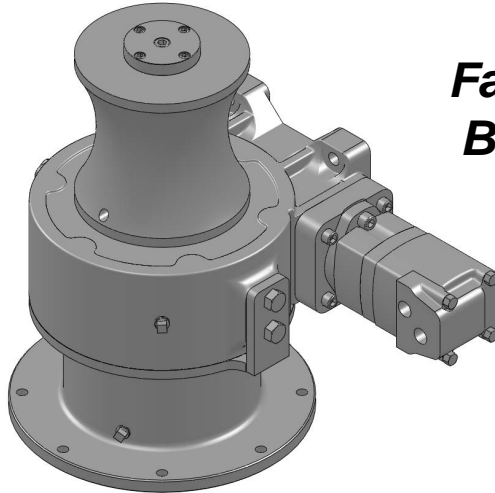

***Fast Dependable
Bloom Winches***

***A Pull Above
the Rest***

Bloom™ Hydraulic Speed Reducers – Standard Features

- GEAR CASE** - Made of high strength cast iron. Completely sealed for oil enclosed operation and to keep dirt out.
- WORM SHAFT** - One piece alloy steel hardened and ground to insure long service.
- WORM GEAR** - High tensile aluminum-nickel alloy bronze. Use of optimum lead and pressure angles transmit maximum power to the drum efficiently.
- GEAR RATIO** - 25:1 and 12.5:1 ratios provide optimum efficiency in power and speed.
- BEARINGS** - Worm gear and worm shaft run on tapered roller bearings in an oil enclosed gear case.
- OUTPUT SHAFT** - 2 1/4" diameter heat treated alloy steel minimum tensile strength 150,000 psi.
- CAPSTAN** - Cast aluminum - keyed to shaft.
- MOTOR MOUNT** - SAE(A) 2-bolt flange. 1 1/4" woodruff keyed motor shaft. Motor is directly coupled into worm shaft. No separate coupling required.



BLOOM

Manufacturing Inc.

Winch Division

***Lifting
Pulling
Hoisting***

Toll Free Number: 1-800-394-1139

www.bloommfg.com

"Custom Engineered Solutions"

1443 220th Street., Independence, Iowa 50644 • FAX: 319-827-1140 • PHONE: 319-827-1139

BLOOM™ WINCH



Series 1400 Galv & Series 1400V Galv


“Quality Since
1910”

HYDRAULIC CAPSTAN WINCHES

Industry Applications

Utility - Series 1400 * D O Y & Series 1400V is specifically designed to handle the daily needs of the utility industry

Fishing & Marine – The the Series 1400 * Series Y & 1400V provides optimum performance in marine applications and environments. Bloom Capstan Winches are commonly used as pot and net haulers, and for dock and barge applications

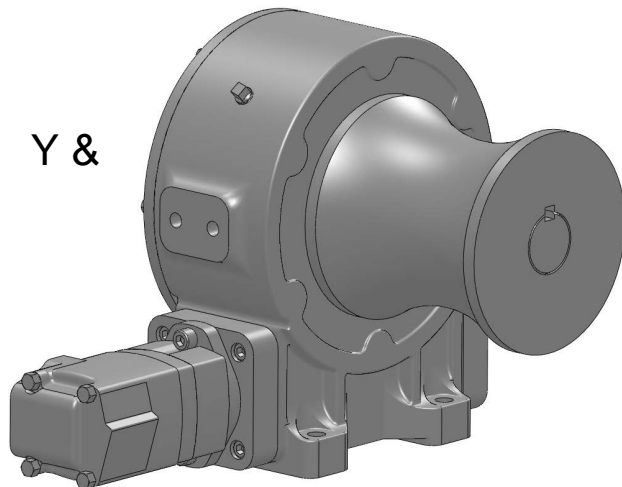


Series 1400 Galv Capstan

Two Series 1400 Capstan Models Available

MODEL 14-6.2-SR-CAP-12.5-GALV
12.5:1 RATIO. Pulls 4000 pounds at 100 feet per minute.

MODEL 14-6.2-SR-CAP-25-GALV
25:1 RATIO. Pulls 7800 pounds at 55 feet per minute.

Based at 3000 P.S.I. And 25 GPM

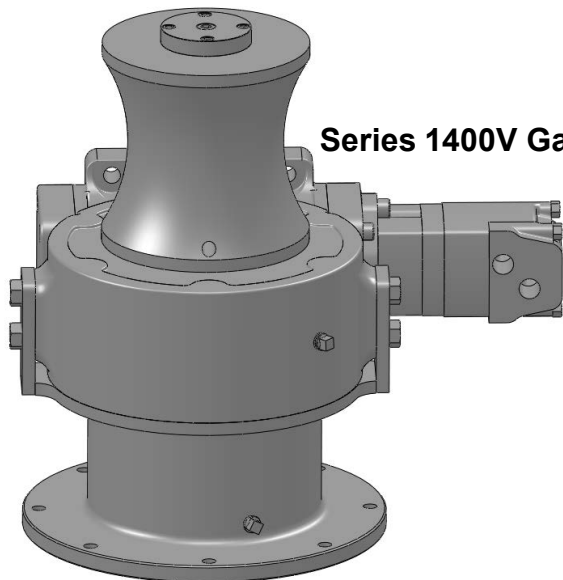

Series 1400V Galv Capstan

Two Series 1400V Capstan Models Available

MODEL 14V-6.2-SR-CAP-12.5-GALV
12.5:1 RATIO. Pulls 4000 pounds at 100 feet per minute.

MODEL 14V-6.2-SR-CAP-25-GALV
25:1 RATIO. Pulls 7800 pounds at 55 feet per minute.

Based at 3000 P.S.I. And 25 GPM




BLOOM™ WINCH





Dimensional Drawings

Series 1400 Galv Capstan

"Quality Since 1910"

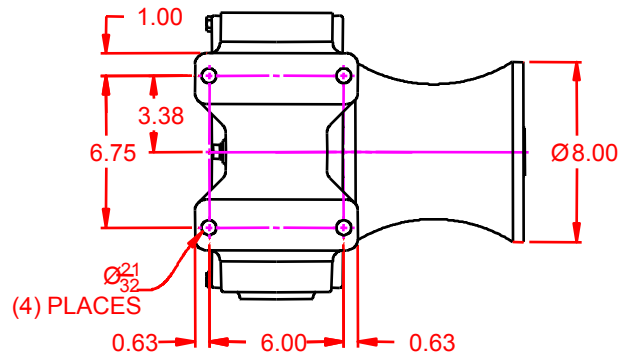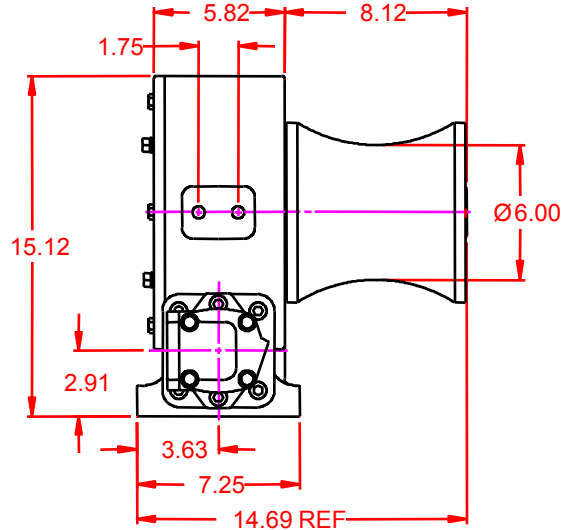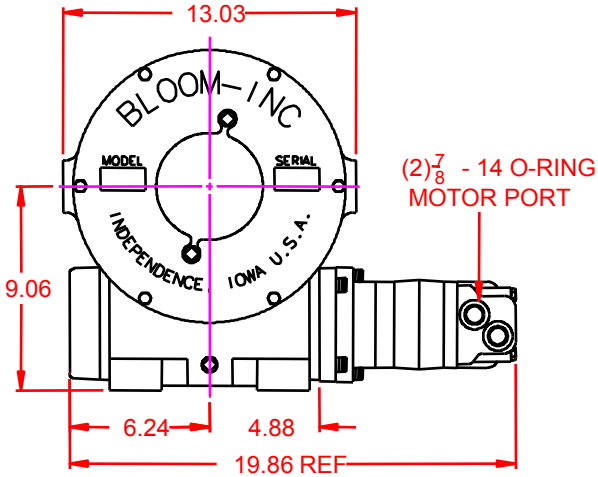

Performance Data

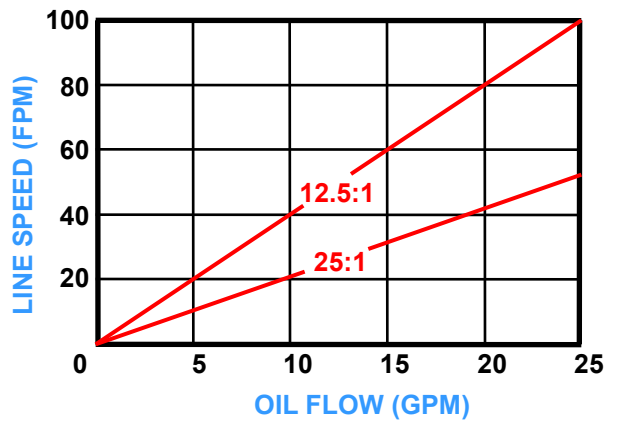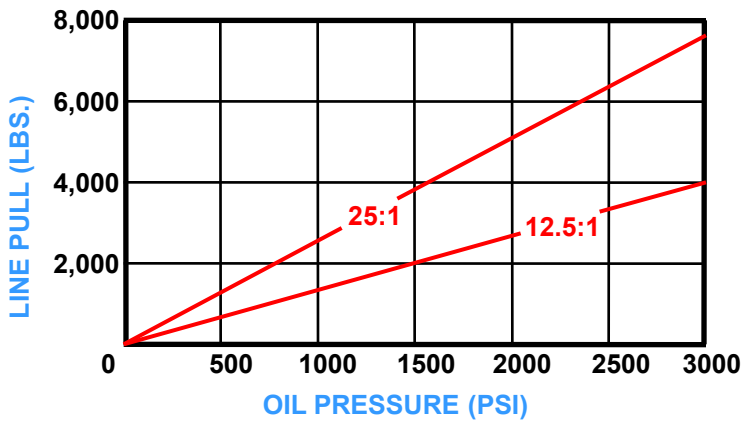



BLOOM™ WINCH





Dimensional Drawings

Series 1400V Galv Capstan

"Quality Since 1910"

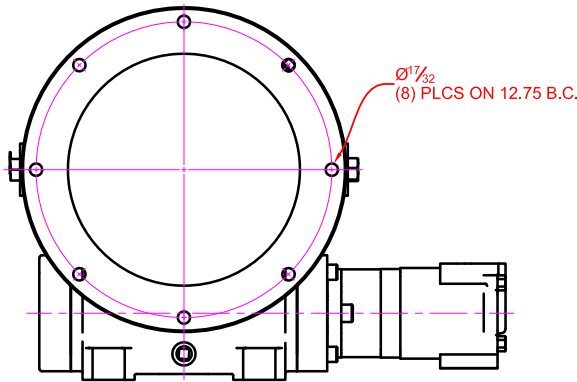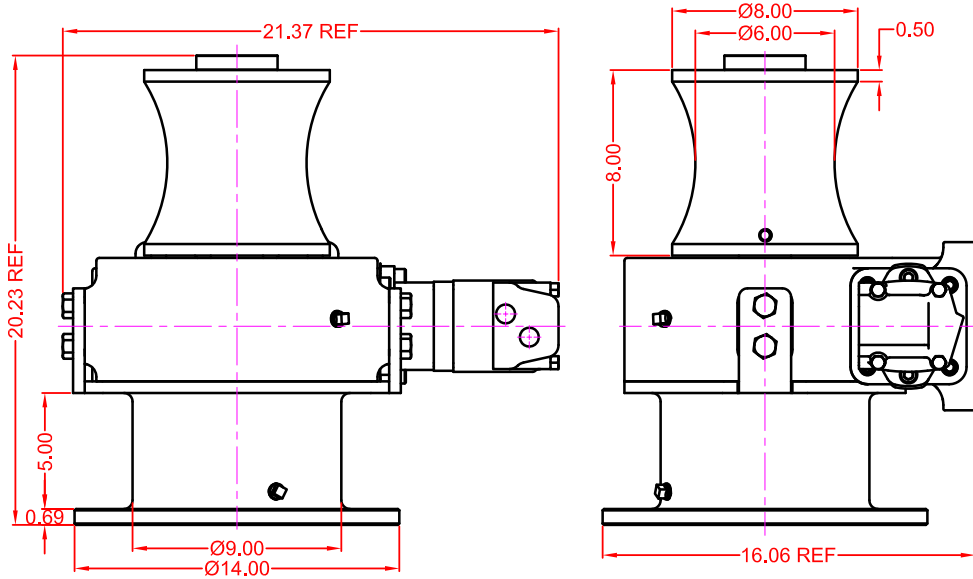

Performance Data

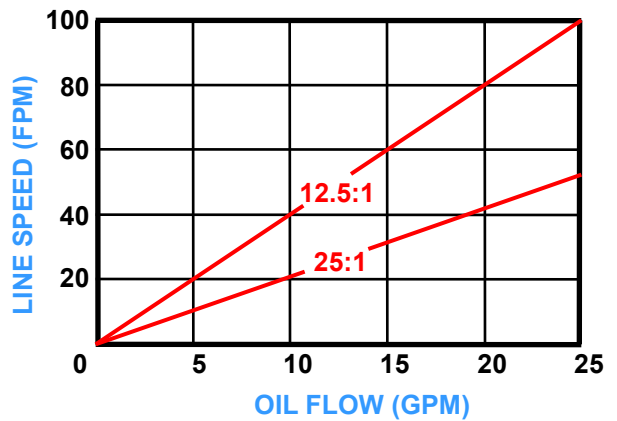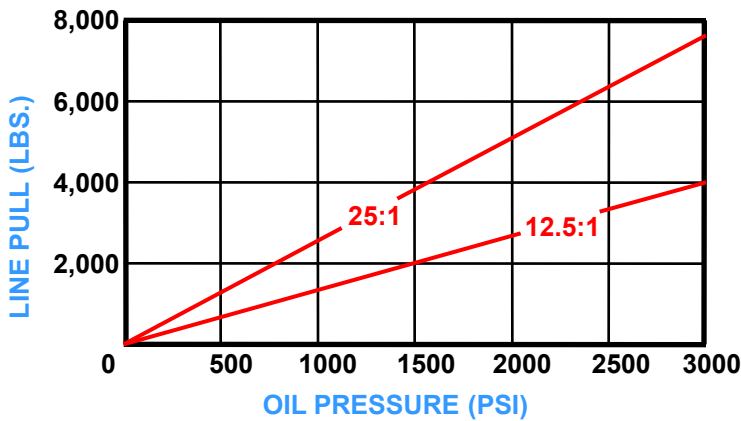

BLOOM™ WINCH

Correct choice of Directional Control Valves for Bloom Winches

Tandem Center Spool Valve – Work Ports are **blocked** in neutral position

Use on all winches that use motor only to hold load.

*Winches require ridged mounting plate.
See owner's manual for information about proper mounting plate thickness or call Bloom Sales Engineer at factory


WARNING!

Goods are not intended for use in the moving or lifting of persons!

The winches described herein are neither designed nor intended for use or application to equipment used in the lifting or moving of persons and it is understood that all such use shall be at the sole risk of the user.

The cable clamps on winches are not designed to hold rated loads. A minimum of 5 wraps of cable must be left on drum barrel to guarantee holding of rated load.

Applications of winch where life would be endangered by any event are not recommended.



BLOOM Manufacturing Inc. **Winch Division**

1443 220th Street,, Independence, Iowa 50644

FAX 319-827-1140 PHONE 319-827-1139

www.bloommfg.com

©Copyright 2015 Bloom Mfg. Inc.